

# solo specs



## small but powerful

Re-engineered and rethought for the next generation of content creation, the solo is a 2U standalone server, built for the everyday show or project.

## Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty


## Bundled accessories

Power Cable (IEC UK/EU/US)  
Getting Started Guide

## Physical specifications

|                            |                             |                            |                             |
|----------------------------|-----------------------------|----------------------------|-----------------------------|
| <b>Packed Dimensions:</b>  | <b>W</b><br>575mm<br>22.64" | <b>H</b><br>210mm<br>8.27" | <b>D</b><br>640mm<br>25.2"  |
| <b>Unit Dimensions:</b>    | <b>W</b><br>430mm<br>16.93" | <b>H</b><br>88mm<br>3.5"   | <b>D</b><br>495mm<br>19.48" |
| <b>Unit + Rack Handles</b> |                             |                            | <b>D</b><br>520mm<br>20.5"  |
| <b>Rack Depth:</b>         |                             |                            | <b>D</b><br>485mm<br>19.09" |
| <b>Unit Weight:</b>        |                             | 12kg                       | 26.5lbs                     |
| <b>Packed Unit Weight:</b> |                             | 15kg                       | 33.1lbs                     |

# solo specs

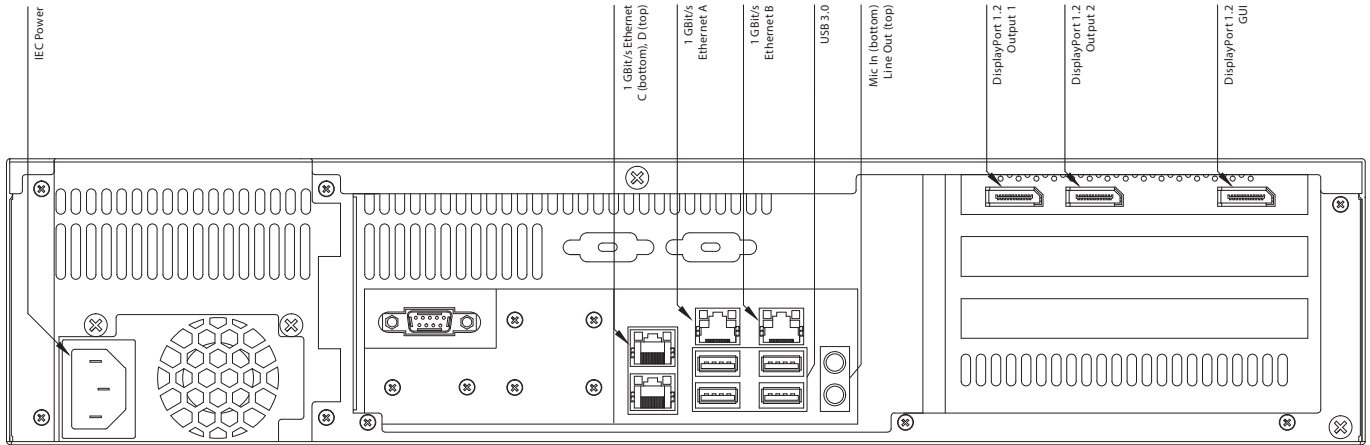

## Hardware specifications

**Voltage:** 100-240V, 50-60Hz

**Power Consumption:**

240VA @ 240V, 50Hz (max)

**Operating System:** Windows 10 IoT LTSC 2016

**CPU:** Xeon Quad-Core 3.8Ghz

**Memory:** 8GB DDR4 ECC RAM

**Environmental Tolerances:**

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

**Mounting System:**

2U 19" rack mount

**Audio:** On-board Audio or Pro Audio

**Storage:** 1× 150GB SSD

(Internal System Drive)

1× 1920GB SSD

## System connectivity I/O

**Video Output:**

1× Displayport 1.2 (GUI)

2× DisplayPort 1.2 (4096 × 2160 max)

**Video Input:**

Choice of:

No capture card fitted (default)

or

3× HD-SDI or 2× 3G-SDI

or

2× HDMI (1920 × 1080@60 max)

**Ethernet:**

Choice of:

4× 1 Gigabit LAN (default)

or

Additional 2× 10Gigabit LAN

**Audio In/Out:**

Choice of:

On-board audio (default)

1× Mic in

1× Line Out

or

Pro-Audio

2× Balanced XLR In/Out

1× 1/4" Headphones Jack

ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

**Data/Peripherals:**

2× USB 2.0

4× USB 3.0

## Optional configurations

solo base unit

solo base unit + SDI capture

solo base unit + HDMI capture

solo base unit + SDI capture + Pro Audio

solo base unit + HDMI capture + Pro Audio

solo base unit + 10G networking card + Pro Audio