

# 4x4pro specs



## Push more pixels

The flagship of the pro range, the 4×4pro sets the industry benchmark for power, flexibility and convenience.

## Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty (plus options to extend warranty length)

### **Bundled** accessories


Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide, Backmounted Rails.

## Physical specifications

Packed Dimensions:	W	Н	D
	711mm	508mm	737mm
	28"	20"	29"
Unit Dimensions:	W	Н	D
	445mm	178mm	593mm
	17.52"	7"	23.35"
Unit + Rack Handles	W		D
	483mm		621mm
	19"		24.45"
Rack Depth:			D
			585mm
			23.03"
Unit Weight:		19.5kg	43lbs
Packed Unit Weight:		26kg	57lbs



# 4x4pro specs

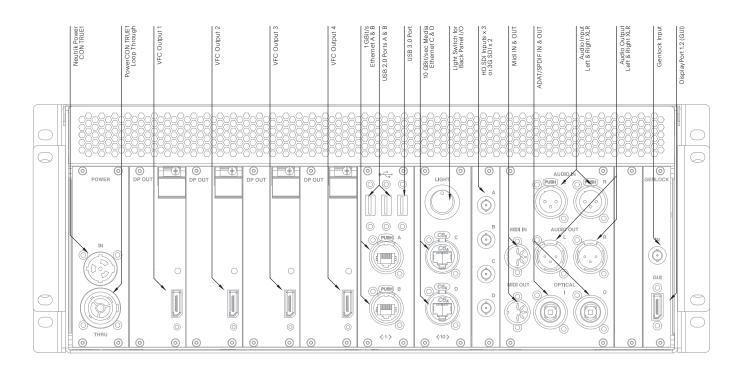

### Hardware specifications

Voltage: 100-240V, 50-60Hz Power Consumption: 800W @ 110V (normal) 1000W @ 110V (max)

Operating System: Windows 8.1

Embedded Pro

CPU: Dual Intel® Xeon® Hexa-Core 3.5Ghz

Memory: 16GB DDR3 ECC RAM Environmental Tolerances: Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System: 4U 19" rack mount

**Audio:** RME Professional **OS:** 2× 80GB SSD

(Internal System Drive, Restore Drive)

Storage: 2TB Removable SSD RAID Array

(expandable)

## System connectivity I/O

### Video Output:

1× DisplayPort 1.2 (GUI) 4× VFC Output Slots Ships standard with DisplayPort 1.2 VFC cards (4096 × 2160 max)

Different Video Format Conversions cards also available, refer to VFC Specifications

#### Video Input:

4× HD-SDI or 2× 3G-SDI

#### Analogue Audio:

2× Balanced XLR Output 2× Balanced XLR Input 1× 1/4" Headphones Jack Digital Audio: ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

General Network: 1× Gigabit LAN

Artnet: 1× Gigabit LAN

Media Network: 2× 10Gb/sec LAN

Data/Peripherals: 2× USB 2.0 3× USB 3.0

Video Sync: BNC Genlock