

# gx 1 specs



## The future of live show design

The unrivalled combination of power, size and affordability you get from gx 1 gives you full access to the generative content world.

### Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty (plus options to extend warranty length)


### Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide, Backmounted Rails.

### Physical specifications

<b>Packed Dimensions:</b>	<b>W</b> 711mm 28"	<b>H</b> 270mm 10.62"	<b>D</b> 737mm 29"
<b>Unit Dimensions:</b>	<b>W</b> 445mm 17.52"	<b>H</b> 88.9mm 3.5"	<b>D</b> 593mm 23.35"
<b>Unit + Rack Handles</b>	<b>W</b> 482mm 19"		<b>D</b> 621mm 24.45"
<b>Rack Depth:</b>			<b>D</b> 585mm 23.03"
<b>Unit Weight:</b>		10.8kg	23.8lbs
<b>Packed Unit Weight:</b>		18.6kg	41lbs

# gx 1 specs

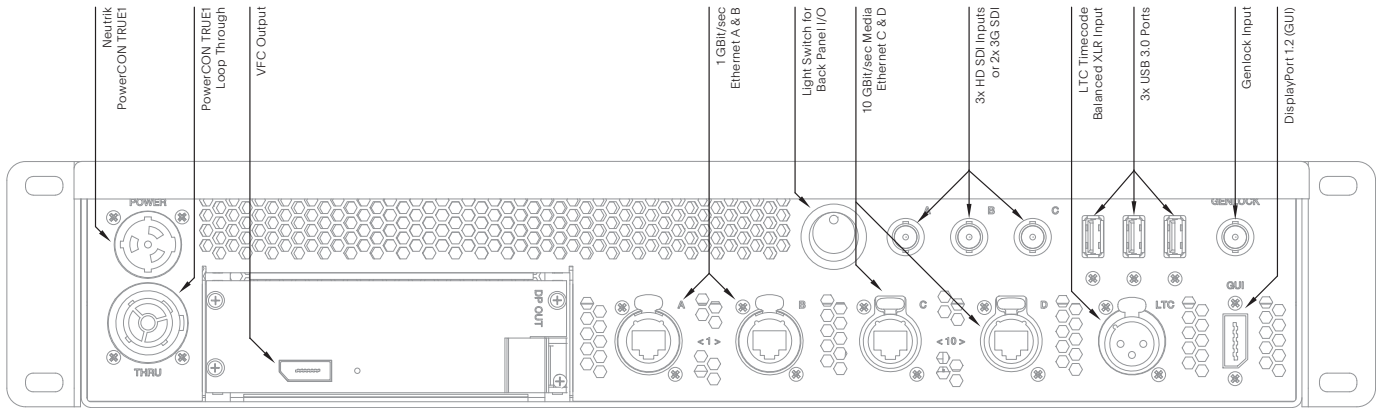

## Hardware specifications

**Voltage:** 100-240V, 50Hz - 60Hz

**Power Consumption:**

400VA @ 240V, 50Hz

**Operating System:** Windows 10 IoT

Enterprise LTSC

**CPU:** Xeon Quad-Core 3.7Ghz

**Memory:** 16GB DDR4 RAM

**Environmental Tolerances:**

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

**Mounting System:**

2U 19" rack mount

**OS:** 2x 80GB SSD

(Internal System Drive, Restore Drive)

**Storage:** 2TB SSD

## System connectivity I/O

**Video Output:**

1x DisplayPort 1.2 (GUI)

1x VFC Output Slot

Ships standard with DisplayPort 1.2 VFC card (4096 x 2160 max)

Different Video Format Conversions cards also available, refer to VFC Specifications

**Video Input:**

3x HD-SDI or 2x 3G-SDI

**LTC Timecode:**

1x Balanced XLR Input

**General Network:** 1x Gigabit LAN

**Artnet:** 1x Gigabit LAN

**Media Network:** 2x 10Gb/sec LAN

**Data/Peripherals:**

5x USB 3.0

**Video Sync:** BNC Genlock