

# solo specs



## small but powerful

Re-engineered and rethought for the next generation of content creation, the solo is a 2U standalone server, built for the everyday show or project.

## Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty


## Bundled accessories

Power Cable (IEC UK/EU/US)  
Getting Started Guide

## Physical specifications

<b>Packed Dimensions:</b>	<b>W</b> 575mm 22.64"	<b>H</b> 210mm 8.27"	<b>D</b> 640mm 25.2"
<b>Unit Dimensions:</b>	<b>W</b> 430mm 16.93"	<b>H</b> 88mm 3.5"	<b>D</b> 495mm 19.48"
<b>Unit + Rack Handles</b>	<b>W</b> 482mm 19"		<b>D</b> 520mm 20.5"
<b>Rack Depth:</b>			<b>D</b> 485mm 19.09"
<b>Unit Weight:</b>		12kg	26.5lbs
<b>Packed Unit Weight:</b>		15kg	33.1lbs

# solo specs

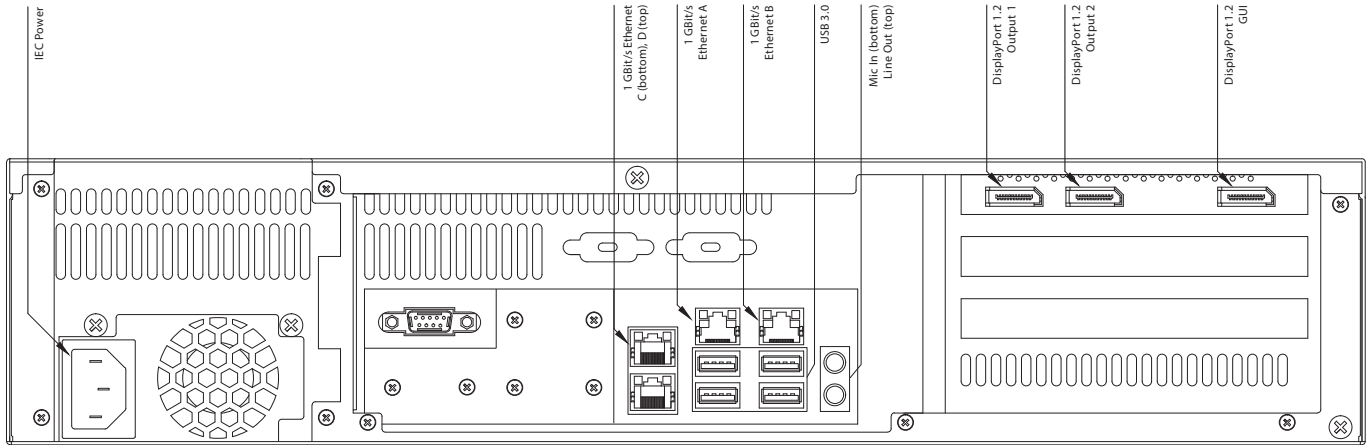

## Hardware specifications

**Voltage:** 100-240V, 50-60Hz

**Power Consumption:**

240VA @ 240V, 50Hz (max)

**Operating System:** Windows 10 IoT LTSC 2016

**CPU:** Xeon Quad-Core 3.8Ghz

**Memory:** 8GB DDR4 ECC RAM

**Environmental Tolerances:**

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

**Mounting System:**

2U 19" rack mount

**Audio:** On-board Audio or Pro Audio

**Storage:** 1× 150GB SSD

(Internal System Drive)

1× 1920GB SSD

## System connectivity I/O

**Video Output:**

1× Displayport 1.2 (GUI)

2× DisplayPort 1.2 (4096 × 2160 max)

**Video Input:**

Choice of:

No capture card fitted (default)

or

3× HD-SDI or 2× 3G-SDI

or

2× HDMI (1920 × 1080@60 max)

**Ethernet:**

Choice of:

4× 1 Gigabit LAN (default)

or

Additional 2× 10Gigabit LAN

**Audio In/Out:**

Choice of:

On-board audio (default)

1× Mic in

1× Line Out

or

Pro-Audio

2× Balanced XLR In/Out

1× 1/4" Headphones Jack

ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

**Data/Peripherals:**

2× USB 2.0

4× USB 3.0

## Optional configurations

solo base unit

solo base unit + SDI capture

solo base unit + HDMI capture

solo base unit + SDI capture + Pro Audio

solo base unit + HDMI capture + Pro Audio

solo base unit + 10G networking card + Pro Audio