

2x4pro specs



The power to be flexible

The 2x4pro with up to two 4k or 8HD outputs, meets all the technical requirements for your everyday shows and projects.

Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty (plus options to extend warranty length)


Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide + Manual, Backmounted Rails.

Physical specifications

Packed Dimensions:	W	H	D
	711mm 28"	508mm 20"	737mm 29"
Unit Dimensions:	W	H	D
	445mm 17.52"	178mm 7"	593mm 23.35"
Unit + Rack Handles	W	D	
	482mm 19"	621mm 24.45"	
Rack Depth:	D		
		585mm 23.03"	
Unit Weight:	16.2kg		36.5lbs
Packed Unit Weight:	24.8kg		54.5lbs

2x4pro specs

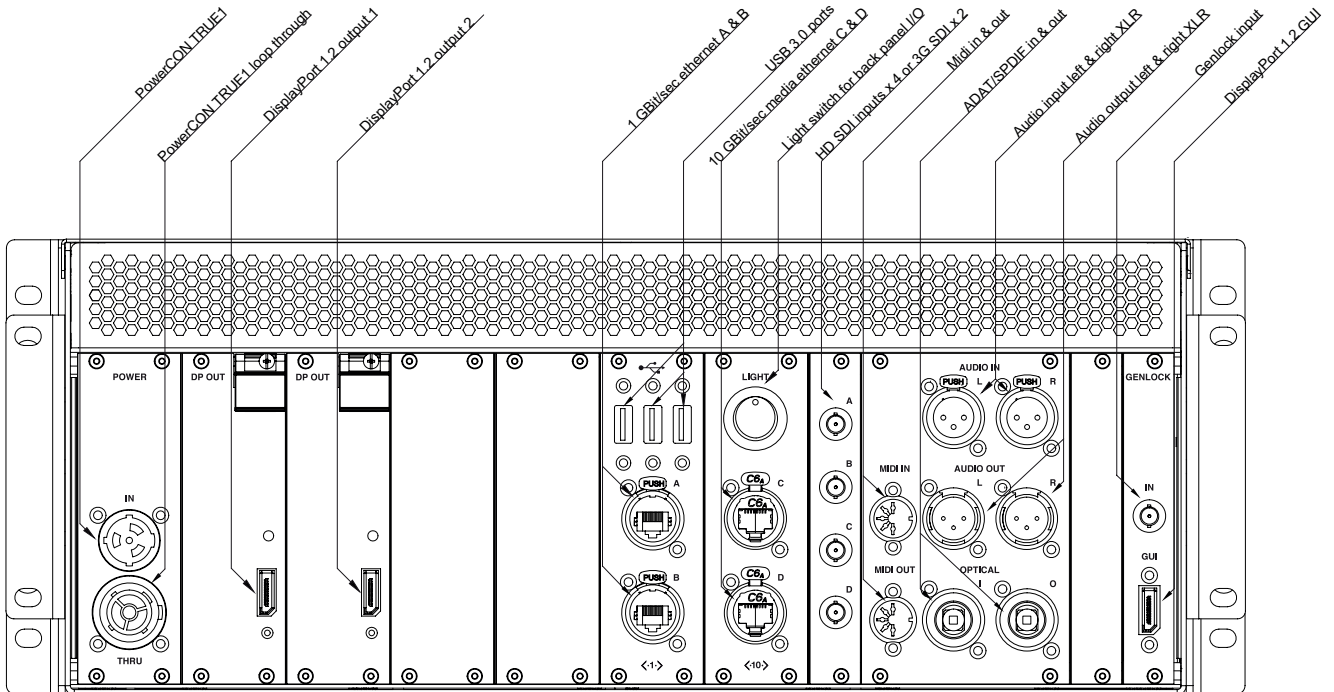

Hardware specifications

Voltage: 100-240V, 50-60Hz
Power Consumption:
 450W @ 110V (normal)
 500W @ 110V (max)
Operating System: Windows 10 IoT
 Enterprise LTSC
CPU: Xeon Quad-Core 3.7Ghz

Memory: 16GB DDR4 RAM
Environmental Tolerances:
 Temperature: 5-35°C (40°-95°F)
 Humidity: 5%-95% (non-condensing)
 Altitude: 0-8850 ft (0-2700m)
Mounting System:
 4U 19" rack mount

Audio: RME Professional
Storage: 2 × 80GB SSD
 (Internal System Drive, Restore Drive)
 2TB Internal SSD

System connectivity I/O

Video Output:
 1× DisplayPort 1.2 (GUI)
 2× VFC Output Slots
 Ships standard with DisplayPort 1.2 VFC
 cards (4096 × 2160 max)
 Different Video Format Conversions cards
 also available, refer to VFC Specifications

Video Input:
 4× HD-SDI or 2× 3G-SDI
Analogue Audio:
 2× Balanced XLR Output
 2× Balanced XLR Input
 1× 1/4" Headphones Jack
Digital Audio: ADAT/SPDIF I/O
MIDI: 1× In, 1× Out

General Network: 1× Gigabit LAN
Artnet: 1× Gigabit LAN
Media Network: 2× 10Gb/sec LAN
Data/Peripherals:
 5× USB 3.0
Video Sync: BNC Genlock