

2x2plus specs



Power for everyone

The 2x2plus is a versatile 2U server that brings the flexibility of the disguise platform to smaller shows and fixed installations.

Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty


Bundled accessories

Power Cable (IEC UK/EU/US), 2x Single Link DP to DVI adapters, Getting Started Guide.

Physical specifications

| | | | |
|----------------------------|-----------------------------|----------------------------|-----------------------------|
| Packed Dimensions: | W 575mm 22.64" | H 210mm 8.27" | D 640mm 25.2" |
| Unit Dimensions: | W 430mm 16.93" | H 88mm 3.5" | D 495mm 19.48" |
| Unit + Rack Handles | W 483mm 19" | | D 520mm 20.5" |
| Rack Depth: | | | D 485mm 19.09" |
| Unit Weight: | | 11.9kg | 26.3lbs |
| Packed Unit Weight: | | 17kg | 37.5lbs |

2x2plus specs

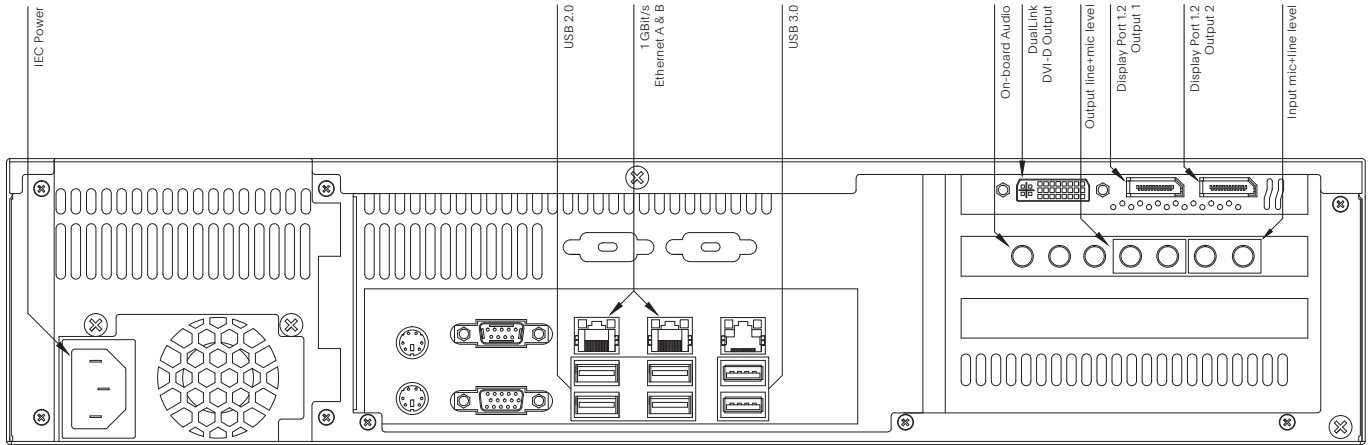

Hardware specifications

Voltage: 100-240V, 50-60Hz

Power Consumption:

350W @ 230V (max)

Operating System: Windows 8.1

Embedded Pro

CPU: Intel® Xeon® Quad-Core 3.7Ghz

Memory: 8GB DDR3 RAM

Environmental Tolerances:

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System:

2U 19" rack mount

Audio: On-board Audio or Pro Audio

OS: 1x 80GB SSD (Internal System Drive)

Storage: 1x 512GB SSD

System connectivity I/O

Video Output:

1x DVI DualLink (GUI)

2x DisplayPort 1.2 (2560 x 1600 max)

Video Input:

Choice of:

No capture card fitted (default)

or

3x HD-SDI or 2x 3G-SDI

or

1x DVI

Audio In/Out:

Choice of:

On-board audio (default)

or

Pro-Audio

2x Balanced XLR In/Out

1x 1/4" Headphones Jack

ADAT/SPDIF I/O

MIDI: 1x In, 1x Out

Ethernet: 2x 1 Gigabit LAN

Data/Peripherals:

6x USB 2.0

2x USB 3.0