

2x4pro specs



The power to be flexible

The 2x4pro with up to two 4k or 8HD outputs, meets all the technical requirements for your everyday shows and projects.

Warranties & Support

- 2 year return to base hardware warranty
(plus options to extend warranty length)


Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide, Backmounted Rails.

Physical specifications

| | | | |
|----------------------------|-----------------|-----------------|-------------------|
| Packed Dimensions: | W | H | D |
| | 711mm 28" | 508mm 20" | 737mm 29" |
| Unit Dimensions: | W | H | D |
| | 445mm 17.52" | 178mm 7" | 593mm 23.35" |
| Unit + Rack Handles | W | D | |
| | 483mm 19" | 621mm 24.45" | |
| Rack Depth: | | | D |
| | | | 585mm 23.03" |
| Unit Weight: | | | |
| | | | 16.2kg 36.5lbs |
| Packed Unit Weight: | | | |
| | | | 24.8kg 54.5lbs |

2x4pro specs

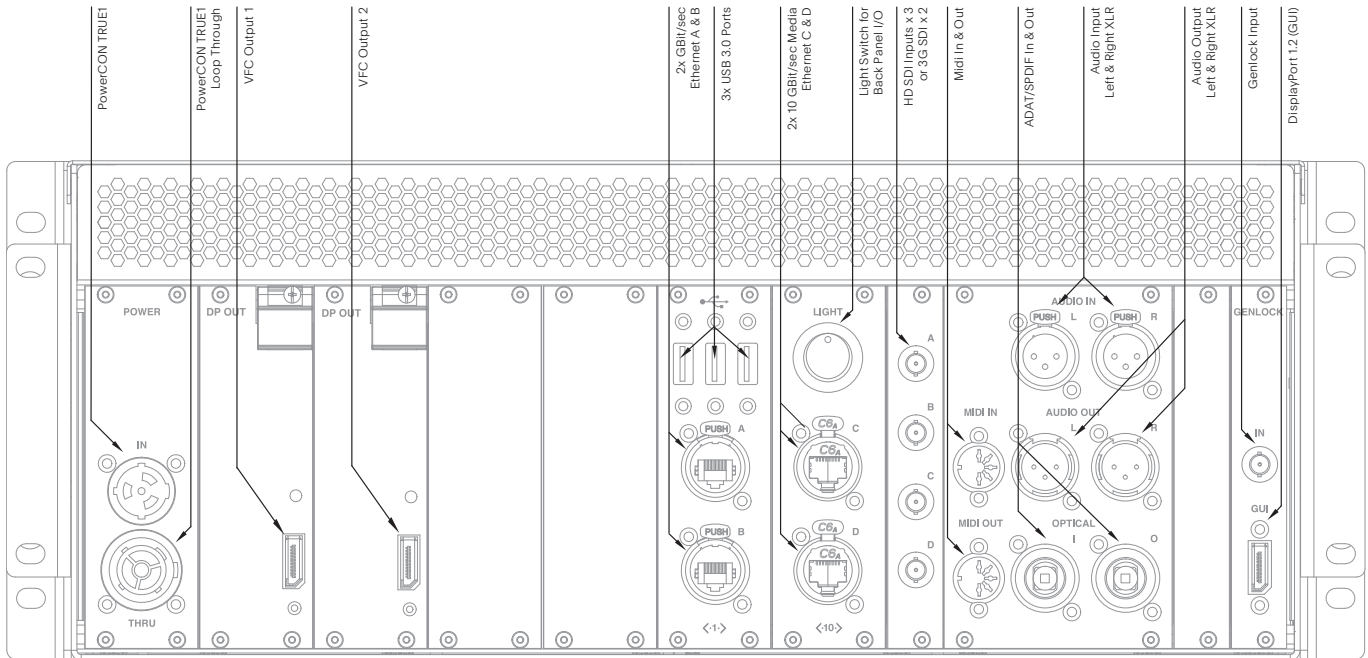

Hardware specifications

Voltage: 100-240V, 50-60Hz

Power Consumption:

450W @ 110V (normal)

500W @ 110V (max)

Operating System: Windows 10 IoT

Enterprise LTSC

CPU: Intel® Xeon® Quad-Core 3.7Ghz

Memory: 16GB DDR4 RAM

Environmental Tolerances:

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System:

4U 19" rack mount

Audio: RME Professional

OS: 2x 80GB SSD (Internal System Drive)

Storage: 2TB Internal SSD

System connectivity I/O

Video Output:

1x DisplayPort 1.2 (GUI)

2x VFC Output Slots

Ships standard with DisplayPort 1.2 VFC cards (4096 x 2160 max)

Different Video Format Conversions cards also available, refer to VFC Specifications

Video Input:

4x HD-SDI or 2x 3G-SDI

Analogue Audio:

2x Balanced XLR Output

2x Balanced XLR Input

1x 1/4" Headphones Jack

Digital Audio: ADAT/SPDIF I/O

MIDI: 1x In, 1x Out

General Network: 1x Gigabit LAN

Artnet: 1x Gigabit LAN

Media Network: 2x 10Gb/sec LAN

Data/Peripherals:

5x USB 3.0

Video Sync: BNC Genlock