



Take live events to the next frontier

The gx 3 is the new go-to media server for touring artists who want to run the most intricate set designs.

Warranties & Support

- 2 year return to base hardware warranty

Bundled accessories

- Keyboard
- Mouse
- Power Cable (Plug-True1)
- Hardware Guide

Optional accessories

- Rack slides

Upgrades

(AS - At Sale, F - Field)


- Storage Upgrade 7.68TB ^{AS, F}
- Storage Upgrade 15.35TB ^{AS, F}

Software

- Notch Playback Licence (2 years)

Physical specifications

Packed Dimensions:	W	H	D
	711mm 28"	508mm 20"	737mm 29"
Unit Dimensions:	W	H	D
	445mm 17.52"	178mm 7"	593mm 23.35"
Unit + Rack Handles	W	D	
	483mm 19"	621mm 24.45"	
Rack Depth:			D
			585mm 23.03"
Unit Weight:	14.4 kg		
	31.75 lbs		
Packed Unit Weight:	20.46 kg		
	45.1 lbs		

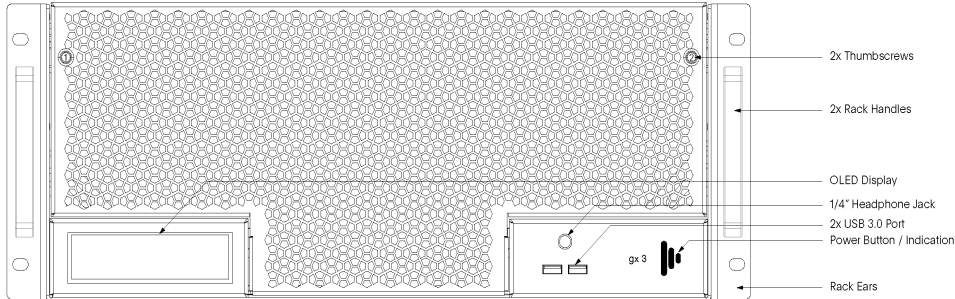


Hardware specifications

Voltage: 100-240V, 50-60Hz
Power Connection: Neutrik powerCON True1
Power Consumption Peak: 700 W
Heat Dissipation Peak: 2,388 BTU/hr
Max decibel rating: 56dB

Environmental Tolerances:
 Temperature: 5-35°C (40°-95°F)
 Humidity: 5%-95% (non-condensing)
 Altitude: 0-2700m (0-8850 ft)

Operating System: Windows 10 Enterprise SAC
OS: 2x 256GB SSD
Storage: 3.84TB SSD (default)

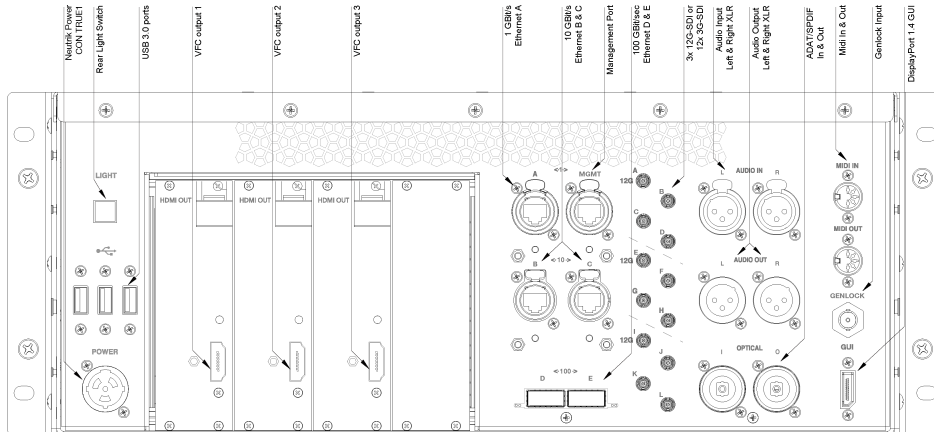

System connectivity I/O

Video Output:

1x DisplayPort 1.4 (GUI)
 3x VFC Output Slots
 Ships standard with HDMI 2.0 VFC cards

Different Video Format Conversion Cards also available, refer to VFC specifications

Video Input:

3x 12G inputs or 12x 3G inputs (HD-BNC connectors)

Audio:

Balanced XLR (circular 3-pin connector) - 2x in, 2x out
 Analogue (1/4 headphone jack) - 1x in

Optical Audio:

ADAT/SPDIF (Toslink connector) - 1x in, 1x out

MIDI:

MIDI (circular 5-pin DIN connector) - 1x in, 1x out

General Network:

1x 1Gb/sec Ethernet
 2x 10Gb/sec Ethernet
High Speed Network:
 2x 100Gb/sec Ethernet
System Management Controller:
 1x Management Port (Ethernet)

Data/Peripherals:

5x USB 3.0
Video Sync:
 1x BNC Genlock