



Enhance your broadcast storytelling

The px is our high-performance render hardware designed to work seamlessly with Porta, ensuring the best solution for configuration.

Warranties & Support

– 2 year return to base hardware warranty



Bundled accessories

- Keyboard
- Mouse
- Power Cable (US/EU/UK)
- Hardware Guide
- Rackslides

Physical specifications

Packed Dimensions:	W	H	D
	585mm 23.03"	255mm 10.04"	1100mm 43.3"
Unit Dimensions:	W	H	D
	440mm 17.32"	88mm 3.46"	800mm 31.5"
Unit + Rack Handles	W	D	
	483mm 19"	621mm 24.45"	
Rack depth:			D
			836mm 32.9"
Unit Weight:		24.3 kg 53.5 lbs	

px specs

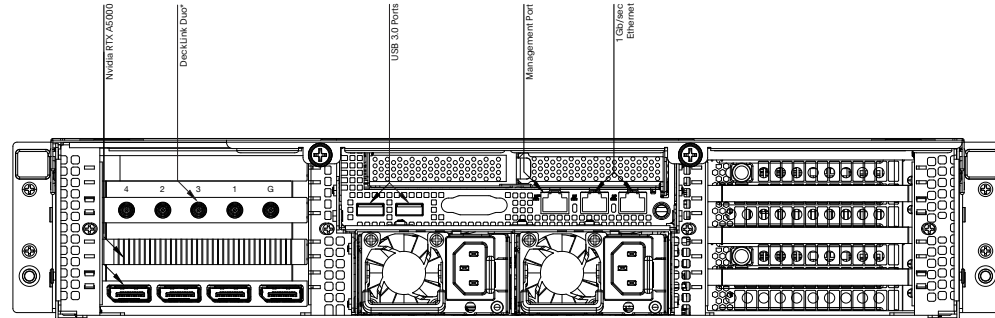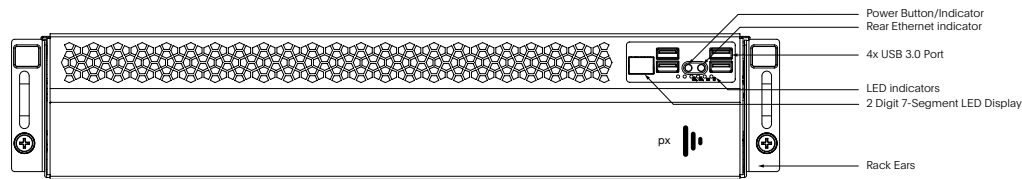

Hardware specifications

Voltage: 100-240V, 50-60Hz
Power Connection:
IEC C13/C19

Environmental Tolerances:
Temperature: 10-35°C (50°-95°F)
Humidity: 20%-90% (non-condensing)

Operating System: Windows 10 Enterprise SAC
OS: 1× 256GB SSD
Storage: 1.92TB SSD (default)

System connectivity I/O

Video Output:
4× DisplayPort 1.4 (GUI)
4× bidirectional 3G-SDI connections configurable for either video input or video output (BNC connector)

Audio:
SDI Audio Input
16 channels embedded in SD and HD
SDI Audio Output
16 channels embedded in SD and HD

General Network:
2× 1Gb/sec Ethernet

Data/Peripherals:
4× USB 3.0
2× USB 3.0
6× USB 3.0 (x4 Front, x2 Rear)

Video Input*:
4× bidirectional 3G-SDI connections configurable for either video input or video output (BNC connector)

* optional paid-for upgrade.

** for countries with variable power supply, we recommend a UPS to provide a consistent voltage.