# EX 3 specs





### Bring pixel-perfect experiences to life

EX 3 is a video playback and pixel-perfect mapping solution designed specifically for location-based experiences and fixed installations.

### Warranties & Support

- 2 year return to base hardware warranty

#### **Bundled** accessories

Slide Rail Kit Rack Handles Hardware Guide Power Cable (Plug - IEC) x2:

- USA
- EU
- UK

#### Upgrades

(AS - At Sale, RTM - Return To Manufacturer)

- Storage Upgrade 7.68TB AS, RTM
- Storage Upgrade 15.35TB AS, RTM
- Storage Upgrade 30TB AS, RTM


#### Physical specifications

Packed Dimensions:	<b>W</b> 635mm 25"	<b>H</b> 325mm 12.8"	<b>D</b> 975mm 38.39"
Jnit Dimensions:	<b>W</b> 438.5mm 17.26"	<b>H</b> 88.5mm 3.42"	<b>D</b> 788.8mm 31.06"
Jnit + Rack Handles	<b>W</b> 483.5mm 19.03"		<b>D</b> 821.8mm 32.35"
Rack Depth with Slides:			<b>D</b> 914.6mm 36.01"
Jnit Weight:		20.5kg	45.2lbs
Packed Unit Weight:		35kg	77.16lbs

EX 3 Specification | Q1 2023 sales@disguise.one | www.disguise.one

## EX 3 specs



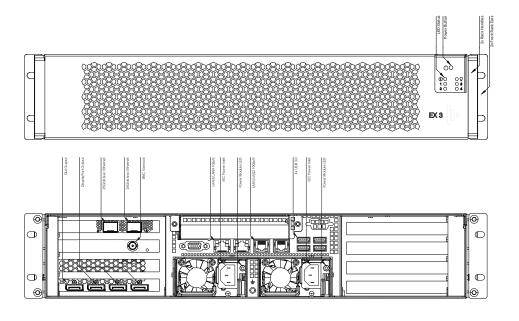

#### Hardware specifications

**Voltage:** 100-240VAC, 50-60Hz\*

Power Connection: IEC
Power Consumption: 485W
Heat Dissipation Peak: 1,653

BTU/hr

Max decibel rating: 66dB\*\*

**Environmental Tolerances:** 

Temperature: 5-30°C

(40°-86°F)

Humidity: 20%-80% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Operating System: Windows®

10 IoT Enterprise SAC **OS:** 1× 2TB SSD

Storage: 1× 3.84TB SSD (default)

Mounting System: 2U 19" rack mount

#### System connectivity I/O

Video Output:

1× DisplayPort 1.4 (GUI) 3× DisplayPort 1.4 General Network:

2× 1Gb/sec Ethernet 2× 10Gb/sec Ethernet **High Speed Network:** 

2× 25Gb/sec SFP28

Data/Peripherals: 4× USB 3.0 Video Sync:

1× BNC Genlock

<sup>\*</sup> for countries with variable power supply we recommend a UPS to provide a consistent voltage

<sup>\*\*</sup> testing has not been completed through official lab testing