



Power to scale

The vx 2 has been engineered to capture and play back video at higher quality, smoothness and resolution than ever before.

Warranties & Support

- 2 year return to base hardware warranty

Bundled accessories

Keyboard, Mouse + Pad, Power Cable (Plug - True1), Hardware Guide, Backmounted Rails.

Upgrades


(AS - At Sale, F - Field, RTM- Return to Manufacturer)

- Storage Upgrade 7.68TB AS, F
- Storage Upgrade 15.36TB AS, F

Physical specifications

Packed Dimensions:	W	H	D
	711mm 28"	508mm 20"	737mm 29"
Unit Dimensions:	W	H	D
	435mm 17.126"	178mm 7"	593mm 23.35"
Unit + Rack Handles	W	D	
	483mm 19"	621mm 24.45"	
Rack Depth:			D
			585mm 23.03"
Unit Weight:		16.5kg	36.3lbs
Packed Unit Weight:		27.2kg	59.9lbs

vx 2 specs

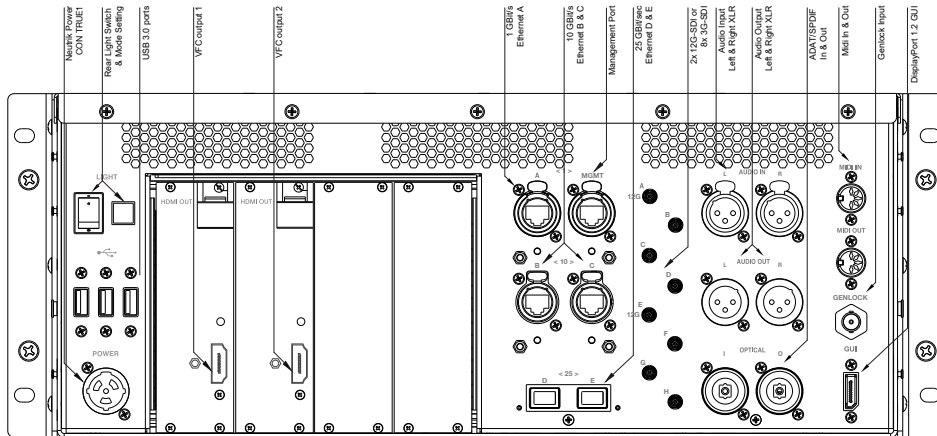

Hardware specifications

Voltage: 115-240V, 50-60Hz*

Power Consumption:
600VA @ 240V, 50Hz (max)

Operating System: Windows
10 Enterprise SAC

Environmental Tolerances:

Temperature: 5-35°C

(40°-95°F)

Humidity: 20%-80%

(non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System:

4U 19" rack mount

Audio: RME Professional

OS: Dedicated drive

Storage:

1× 3.84TB Removable NVMe
SSD (default)

System connectivity I/O

Video Output:

1× Displayport 1.2 (GUI)

2× VFC Output Slots

Ships standard with HDMI 2.0

VFC cards

Analogue Audio:

2× Balanced XLR Input

2× Balanced XLR Output

1× 1/4" Headphones Jack

Digital Audio:

ADAT/SPDIF I/O

MIDI:

1× In, 1× Out

Different Video Format

Conversion Cards also

available, refer to VFC

specifications

Video Input:

2×12G-SDI or 8×3G-SDI

or 2×2160p60 (Quad Split)

(HD-BNC connectors)

General Network:

1× 1Gb/sec Ethernet

2× 10Gb/sec Ethernet

High Speed Network:

2× 25Gb/sec Ethernet

System Management

Controller:

1× Management Port

Data/Peripherals:

5× USB 3.0

Video Sync:

1× BNC Genlock

* for countries with variable power supply we recommend a UPS to provide a consistent voltage