



## Enhance your broadcast storytelling

The px+ is our high-performance render hardware designed to work seamlessly with Porta, ensuring the best solution for configuration.

### Warranties & Support



- 2 year return to base hardware warranty

### Bundled accessories

- Keyboard
- Mouse
- Power Cable (US/EU/UK)
- Hardware Guide
- Rackslides

### Physical specifications

<b>Packed Dimensions:</b>	<b>W</b>	<b>H</b>	<b>D</b>
	585mm 23.03"	255mm 10.04"	1100mm 43.3"
<b>Unit Dimensions:</b>	<b>W</b>	<b>H</b>	<b>D</b>
	440mm 17.32"	88mm 3.46"	800mm 31.5"
<b>Unit + Rack Handles</b>	<b>W</b>	<b>D</b>	
	483mm 19"	825mm 32.48"	
<b>Rack Depth:</b>			<b>D</b> 836mm 32.9"
<b>Unit Weight:</b>			35.5 kg
			78.2 lbs

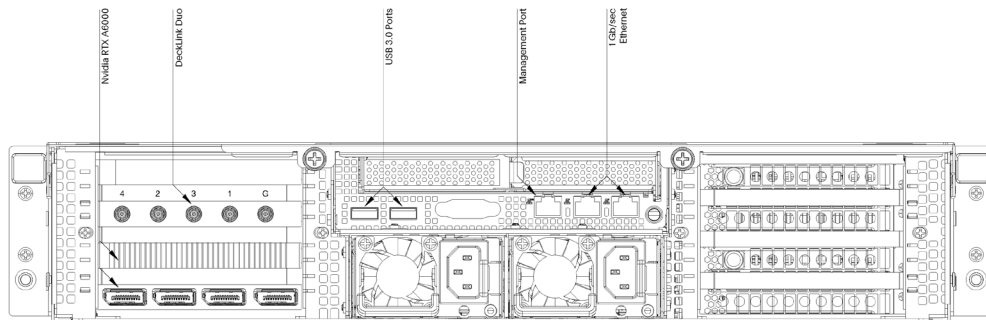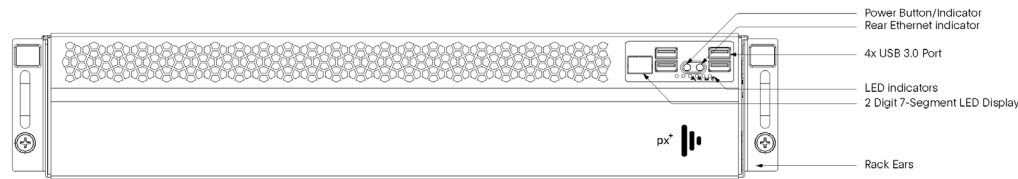

## Hardware specifications

**Voltage:** 100-240V, 50-60Hz  
**Power Connection:** IEC C13/C19

**Environmental Tolerances:**  
 Temperature: 10-35°C (50°-95°F)  
 Humidity: 20%-90% (non-condensing)

**Operating System:** Windows 10 Enterprise SAC  
**OS:** 1× 256GB SSD  
**Storage:** 1.92TB SSD (default)

## System connectivity I/O

**Video Output:**  
 4× DisplayPort 1.4 (GUI)  
 4× bidirectional 3G-SDI connections configurable for either video input or video output (BNC connector)

**Audio:**  
 SDI Audio Input  
 16 channels embedded in SD and HD  
 SDI Audio Output  
 16 channels embedded in SD and HD

**General Network:**  
 2× 1Gb/sec Ethernet

**Data/Peripherals:**  
 4× USB 3.0  
 2× USB 3.0  
 6× USB 3.0 (x4 Front, x2 Rear)

**Video Input:**  
 4× bidirectional 3G-SDI connections configurable for either video input or video output (BNC connector)

\* for countries with variable power supply, we recommend a UPS to provide a consistent voltage.