


# EX 2



## THE GATEWAY TO DISGUISE

The EX 2 has been designed to provide live events and experiences with a compact yet powerful pre-rendered video playback solution, unlocking the gateway to the most advanced live visual experience platform in the world.

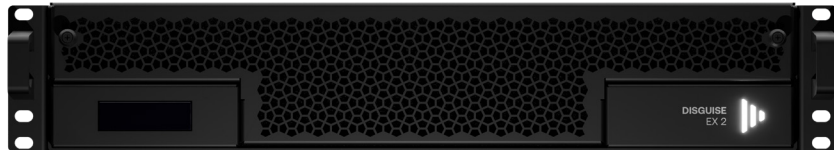

## WARRANTIES & SUPPORT

2 year return to base hardware warranty  
(plus options to extend warranty length)

## BUNDLED ACCESSORIES

Keyboard, Mouse, Power Cable (powerCON True1: USA/EU/UK), Hardware Guide, Rack Rails\*

\*support for server racks with square holes (9.5mm), circle holes (7.1mm) and threaded holes (up to 7.1mm).

## UPGRADES

(AS - At Sale, F - Field)

- Storage Upgrade 3.84TB <sup>AS, F</sup>
- Storage Upgrade 7.68TB <sup>AS, F</sup>
- Storage Upgrade 15.36TB <sup>AS, F</sup>
- Storage Upgrade 30TB <sup>AS, F</sup>

## PHYSICAL SPECIFICATIONS

	W	H	D
<b>Packed Dimensions</b>	620mm 24.4"	310mm 12.2"	850mm 33.46"
<b>Unit Dimensions</b>	441mm 17.4"	88.4mm 3.5"	645.25mm 25.4"
<b>Unit + Rack Handles</b>	483.6mm 19"	88.4mm 3.5"	677.5mm 26.7"
<b>Rack Depth</b>	-	-	677.5mm 26.7"
<b>Unit Weight</b>		11kg 24.2lbs	
<b>Packed Unit Weight</b>		21kg (est) 46.3lbs (est)	

# EX 2

## HARDWARE SPECIFICATIONS

**Voltage:** 100-240V, 50-60Hz\*

**Power Connection:** Neutrik powerCON True1

**Power Consumption Peak:** 312W

**Heat Dissipation Peak:** 1,065 BTU/hr

**Max Decibel Rating:** 52.4db

**Operating System:** Windows 11 Enterprise GAC

**GPU:** NVIDIA RTX 4000 Ada

**Environmental Tolerances:** Temperature:

5-35°C (40°-95°F) / Humidity: 20%-80% (non-condensing) / Altitude: 0-2700m (0-8850 ft)

**Mounting System:** 2U 19" rack mount

**OS:** 1x Internal Storage Drive

**Storage:** 1.92TB Removable NVMe SSD (default)

**Memory:** 64GB RAM (4x 16GB)

## SYSTEM CONNECTIVITY I/O

**Video Output:**

- 1x DisplayPort 1.4 (GUI)
- 2x DisplayPort 1.4 (Outputs)

**Video Input:**

- video input via NDI only

**Audio / Optical Audio / MIDI:**

- N/A

**General Network:**


- 2x 10Gb/s (Ethernet)

**High Speed Network:** 2x 100Gb/sec (QSFP28)

**System Management Controller:** 1x Management Port (Ethernet)

**Data/Peripherals:** 2x USB 3.2 (Gen 2x1)

**Video Sync:** 1x BNC Genlock

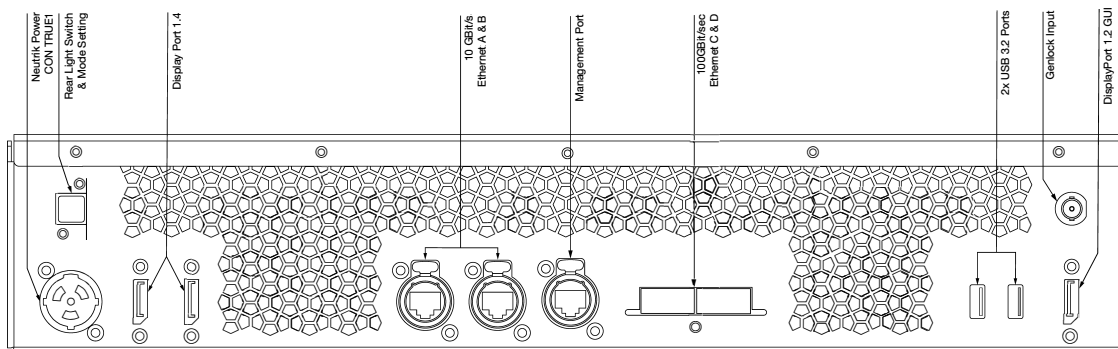

\*for countries with variable power supply we recommend a UPS to provide a consistent voltage.